

# BLACK **IBS144M** 540W- 550W FRAME

## KEY FEATURES



years  
**Product  
Warranty**



years  
**Performance  
Warranty**



Cell  
efficiency up  
to **23.50 %**



Module  
efficiency  
up to

**21.28 %**



Heavy snow load  
up to **5,400 Pa**



Wind load  
up to **2,400 Pa**



**PID Free**



## ELECTRICAL PARAMETERS


Model	IBS144M BlackFrame		
Maximum Power (Pmax/W)	<b>540</b>	<b>545</b>	<b>550</b>
Operating Voltage (Vmpp/V)	41.4	41.6	41.8
Operating Current (Impp/A)	13.05	13.11	13.16
Open-Circuit Voltage (Voc/V)	49.6	49.8	50.0
Short-Circuit Current (Isc/A)	13.86	13.90	13.94
Module Efficiency $\eta_m$ (%)	20.89	21.09	21.28
Power Tolerance		0+3 Wp	
NOCT		43°C±2°C	

Values at Standard Test Conditions STC (AM 1.5, Irradiance 1,000 W/m<sup>2</sup>, Cell Temperature 25°C)

## SPECIFICATIONS

Cell Type	Mono Crystalline PERC
Cells size	182x91mm
Number of cells	144 (6x24)
Weight	29.0 kg
Front side glass	3.2 mm hardened solar tempered glass
Dimensions	2,279x1,134x35 mm
Cable length	1,300mm
Cable cross section size	4 mm <sup>2</sup>
Number of bypass diodes	3
Connectors	MC4 conectable
Frame	Anodized Aluminium Alloy
Junction Box	IP68

## ENGINEERING DRAWINGS

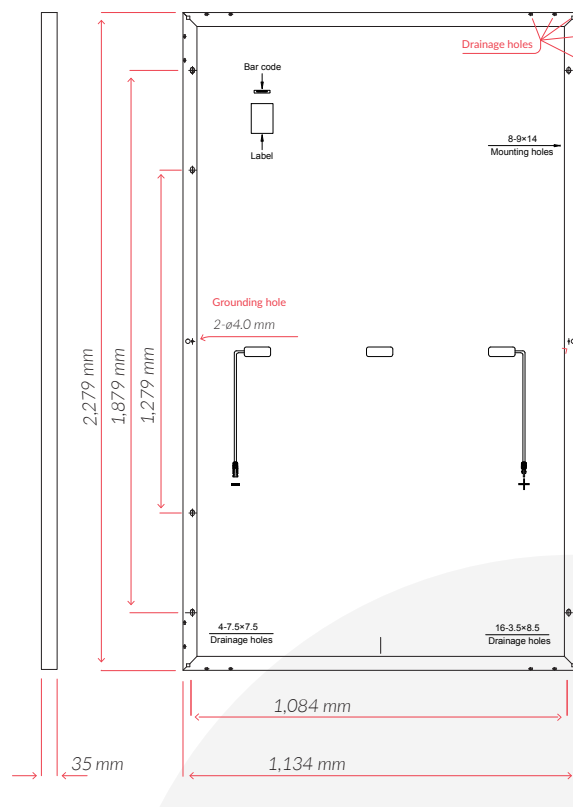

## WORKING CONDITIONS

Maximum System Voltage	DC 1,500 V (IEC)
Operating temperature	-40°C / +85° C
Maximum reverse current	20A
IP protection level	IP68
Safety class	II

## TEMPERATURE COEFFICIENTS

Power temperature coefficient (Pmax)	-0.36 %/°C
Voltage temperature coefficient (Voc)	-0.28 %/°C
Current temperature coefficient (Isc)	+0.05 %/°C



## PACKAGING INFORMATION (I)

Pallet dimension	2,305/1,125/1,255 mm
Pallet weight	930 kg
Modules/pallet	31

## PACKAGING INFORMATION (II)

Container	20 GP	40 HQ
Pallets per container	5	20
Pieces per container	155	620

## PARTNERS