



THREE PHASE STRING INVERTER 100-120 KW

CSI-100KW | CSI-110KW | CSI-120KW



CSI Solar's grid-tied, transformer-less string inverters help to accelerate the use of three-phase string architecture for industrial and commercial rooftop applications.


These inverters are modular design building blocks that provide high yield and enable significant BoS cost savings. They provide up to 98.5% conversion efficiency, a wide operating range of 200-1000 V_{DC}, and 6 or 9 MPPTs for maximum energy harvest.

KEY FEATURES

- Maximum efficiency of 98.5%, Maximum EU efficiency of 98.1%
- 6 or 9 MPPTs to achieve higher system efficiency
- 20A input for each string, perfectly match with Hiku7 series module*
- Integrated DC Switches
- Smart string monitoring
- Integrated anti-PID function (Optional)
- Supports aluminum cable

EFFICIENCY CURVE

CSI-120KW

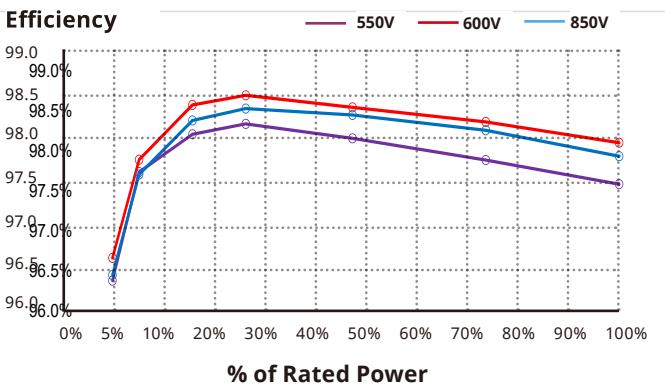

* For detail information, please refer to Installation Manual.

* "20A input for each string, perfectly match with Hiku7 series module", this feature applies to the models of 6 MPPTs only.

10
years

Standard warranty, extension up to 20 years

HIGH RELIABILITY

- Intelligent fan-cooling
- SPD Type II for DC and AC
- Leakage current suppression technology
- DC reverse polarity protection

BROAD ADAPTABILITY

- IP66 protection for harsh environment
- Utility interactive controls: Active power derating, reactive power control and over frequency derating
- Wide MPPT range for flexible string sizing

CSI Solar Co., Ltd. is committed to providing high quality solar products, solar system solutions and services to customers around the world. Canadian Solar was recognized as the No. 1 module supplier for quality and performance/price ratio in the IHS Module Customer Insight Survey, and is a leading PV project developer and manufacturer of solar modules, with over 63 GW deployed around the world since 2001.

MODEL NAME	CSI-100K-T4001A-E	CSI-100K-T4001B-E	CSI-110K-T4001A-E	CSI-110K-T4001B-E	CSI-120K-T4001A-E	CSI-120K-T4001B-E
INPUT (DC)						
Max. Input Voltage			1100 V _{DC}			
Start-up DC Input Voltage			195 V _{DC}			
Rated Input Voltage			600 V _{DC}			
MPPT Voltage Range			200 - 1000 V _{DC}			
Max. String Input No.	12	18	12	18	12	18
MPPT No.	6	9	6	9	6	9
Max. Input Current	6 x 40 A	9 x 32 A	6 x 40 A	9 x 32 A	6 x 40 A	9 x 32 A
Max. DC short-circuit current	6 x 50 A	9 x 40 A	6 x 50 A	9 x 40 A	6 x 50 A	9 x 40 A
OUTPUT (AC)						
Rated AC Output Power	100 kW	100 kW	110 kW	110 kW	120 kW	120 kW
Max. AC Output Power (Apparent)	100 kVA	100 kVA	110 kVA	110 kVA	120 kVA	120 kVA
Rated Output Voltage			380 / 400 V _{AC}			
Grid Connection Type			3 L / N / PE			
Max Output Current	152 A	152 A	167.1 A	167.1 A	182.3 A	182.3 A
Rated Output Frequency			50 / 60 Hz			
THDi			< 3 %			
Power Factor			0.8 leading ... 0.8 lagging			
Zero Export Solution			optional, Smart Meter or EPM-Box needed			
EFFICIENCY						
Max. Efficiency			98.5 %			
EU Efficiency			98.1 %			
ENVIRONMENT						
Protection Degree			IP66			
Cooling			Intelligent Fan Cooling			
Operating Temperature Range			-30 °C to +60 °C			
Operating Humidity			0 - 100 % Non-condensing			
Operating Altitude			4000 m (> 3000 m derating)			
PROTECTION						
DC Switch			Yes			
Anti-Islanding Protection			Yes			
DC Reverse-Polarity Protection			Yes			
DC Insulation Resistance Detection			Yes			
Residual Current Monitoring			Yes			
String Monitoring			Yes			
AC Output Over Current Protection			Yes			
AC Short Circuit Protection			Yes			
Grid Monitoring			Yes			
Anti-PID Module			Optional			
Oversupply Class			II (DC), III (AC)			
DC / AC SPD			DC SPD Type II / AC SPD Type II (Type I Optional)			
DISPLAY AND COMMUNICATION						
Display			LED & APP (via Bluetooth)			
Communication			RS485 / WiFi			
MECHANICAL DATA						
Dimensions (W / H / D)			1050 x 687 x 355 mm			
Weight	90 kg	95 kg	90 kg	95 kg	90 kg	95 kg
DC Inputs Type			MC4			
AC Outputs Type			OT Terminals (Support the AC cables Max. 240mm ²)			
CERTIFICATION						
Safety / EMC			IEC62109-1/2, IEC 61000-6-2/3			
Grid Code			IEC61727 & IEC62116, EN50549-1/2, CEI0-21/16, VDE4105, VDE4110, NRS097			

The specifications and key features contained in this datasheet may deviate slightly from our actual products due to the on-going innovation and product enhancement. CSI SOLAR CO., LTD reserves the right to make necessary adjustment to the information described herein at any time without notice.

Caution: For professional use only. The installation and handling of PV equipment requires professional skills and should only be performed by qualified professionals. Please read the safety and installation instructions before using the product.