

TP660M

Peak Power: 240–265 Wp

Module characteristics:

- Positive only power tolerance: 0 to +3 %
- High mechanical load strength:
Product to withstand high loading pressure of 5400 Pa in accordance with IEC 61215ed.2
- Fully automated production line:
 - Better soldering
 - Better cell spacing tolerance: ± 0.3 mm
 - Better and more consistent product quality
- All Talesun modules have been tested and certified by TUV for ammonia resistance and salt mist corrosion.




Electrical parameters*:

MODEL	240	245	250	255	260	265
Maximum rated power at STC (Pmax)	240W	245W	250W	255W	260W	265W
Voltage at maximum power (Vmpp)	30.3V	30.5V	30.7V	30.7V	30.8V	30.9V
Current at maximum power (Impp)	7.95A	8.05A	8.17A	8.33A	8.46A	8.59A
Open circuit voltage (Voc)	37.4V	37.5V	37.7V	37.8V	37.9V	38.1V
Short circuit current (Isc)	8.58A	8.63A	8.68A	8.73A	8.78A	8.83A
Module efficiency η (%)	14.8	15.1	15.4	15.7	16.0	16.3
Power tolerance	0 to +3 %					
Temperature coefficient	Pmpp	-0.45 % / °C				
	Voc	-0.35 % / °C				
	Isc	+0.05 % / °C				
	NOCT	45 \pm 2 °C				


* STC: Standard Test Conditions at 1000 W/m², Cell temperature 25 °C, AM 1.5

Technical drawings:

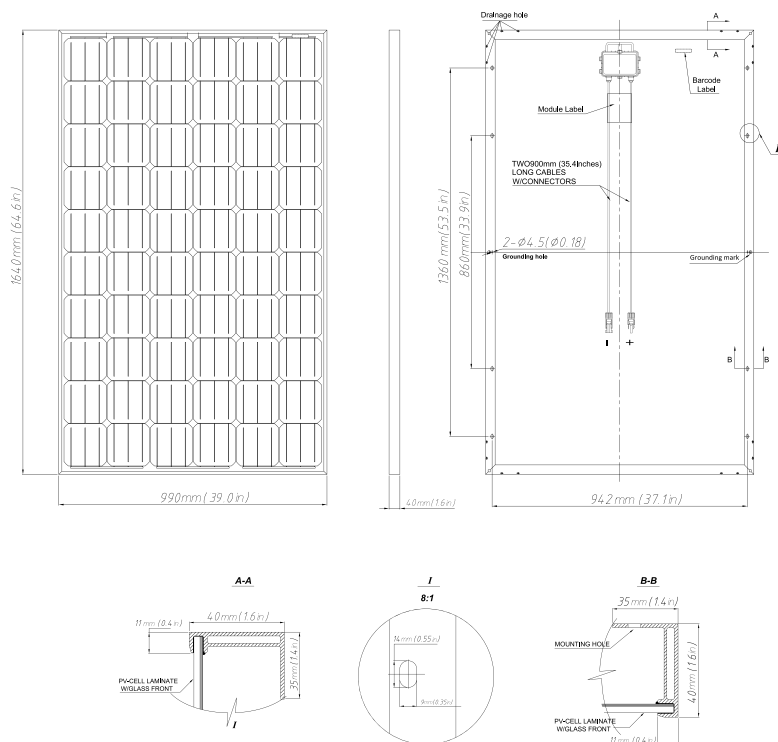


I-V curve:

Output under different radiation and temperature conditions.

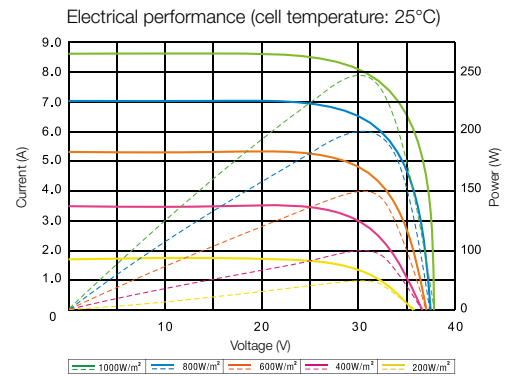

TP660M Pm(W)250

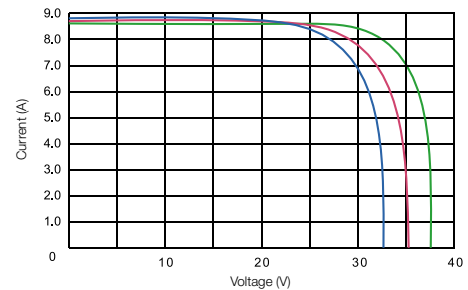

Dimensions:


Cell type	Mono Crystalline
Cell dimensions	156×156 mm (6 inch)
Cell arrangement	6 ×10 (60)
Weight	20 kg
Module dimensions	1640×990×40 mm
Cable length	900 mm
Cable cross section size	4 mm ²
No. of bypass diodes	3/6
Packing configuration	25 per pallet
Frame	Anodized Aluminium
Junction box	IP 65 rate

Operating conditions:

Maximum system voltage	1000 V/DC (IEC)
Operating temperature	-40°C to +85°C
Maximum reverse current (I _R)	15 A
Static loading	5400 Pa
Conductivity at ground	0.1 Ω
Safety class	II
Resistance	≥100 MΩ
Connector	MC4 or identical in construction

Warranty:

Product Quality Warranty: 10 years

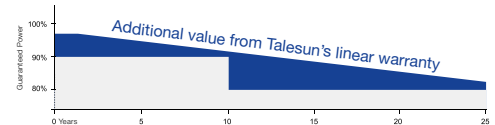

Power warranty –

performance as set forth below:

a) During the first year, Talesun guarantees the actual power output of the module will be no less than 97% of the labeled power output.

b) From year 2 to year 24, the actual annual power decline will be no more than 0.7%; by the end of year 25, the actual power output will be no less than 80% of the labeled power output.

25 year insurance-based guarantee to ensure our product and power output warranty (with non cancelable term).

Certifications & Standards:

- IEC 61215ed.2
- IEC 61701
- IEC 61730
- IEC 62716
- UL 1703
- ISO 9001:2008
- ISO 14001:2004
- OHSAS 18001:2007